



INSTALLATION INSTRUCTIONS

Part Number HA-4098

This filter fits: SEE CATALOG FOR CURRENT APPLICATIONS

Congratulations, you have purchased the finest air filter that money can buy. With proper care, this filter will last 1 million miles or more. This filter can be used in a stock machine, with no modifications required. If any engine modifications have been made tuning/jetting adjustments may be required. There are special installation instructions, so please follow the procedures outlined below to ensure the K&N Filtercharger® seals properly.

INSTALLATION

1. Remove the stock air filter.
2. Carefully clean the inside of the air box.
3. Clean the surface of the open end of the K&N Filtercharger® to remove any oil residue.
4. Remove the backing from the large provided gasket and apply to the open end. (Fig. 1)
5. Clean the surface of the closed end of the K&N Filtercharger® to remove any oil residue.
6. Remove the backing from the small provided gasket and apply to the closed end. (Fig. 2)
7. Install the K&N Filtercharger® into the air box and make sure it is completely seated.
8. Reinstall the outer cover.

THESE INSTRUCTIONS MUST BE FOLLOWED EVERY TIME THE FILTER IS SERVICED, OTHERWISE THE FILTER MAY NOT SEAL, AND DAMAGE TO THE ENGINE COULD RESULT.



Fig. 1

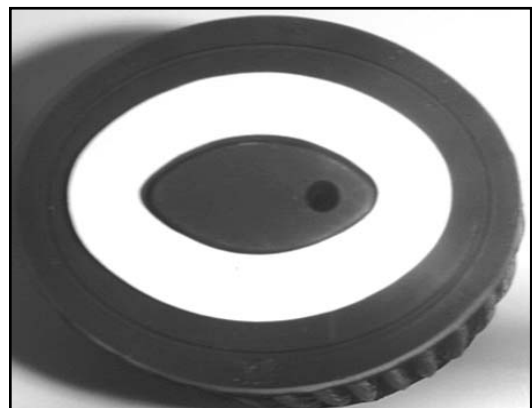


Fig. 2